


# JAM5(L)

## 72/180-215 SOLAR PHOTOVOLTAIC MODULE

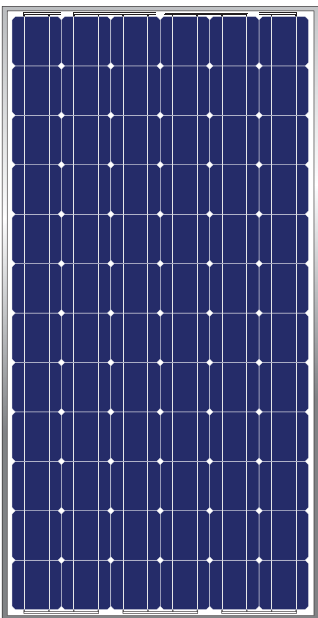

### PRODUCT OVERVIEW

- JA Solar's modules are optimally manufactured and adjusted to meet the needs of the current market; scientifically designed module dimension makes the installation simple and easy; each cell of the module is the acclaimed "Made by JA Solar".
- Our continuous efforts in quality assurance system and certifications the international authentication institutions of JA Solar's products demonstrate our commitment to product quality and customer requirements.

### MODULE CHARACTERISTICS

- High efficiency crystalline silicon solar cells.
- High transmission low iron tempered glass, strong mechanical resistance.
- Standard waterproof junction box, with bypass diode.
- High endurance to different atrocious weather.
- Custom designed modules according to clients' requirement.

### MECHANICAL PARAMETERS

Cell(mm)	Mono 125×125 (L)
Weight(kg)	15.5
Dimensions(L×W×H)(mm)	1580×808×40
Cable Length(mm)	≥900
Cable cross section size(mm <sup>2</sup> )	4
No. of cells and connections	72(12×6)
No. of diodes	3
Packing configuration	25 Pcs./Pallet

### WORKING CONDITIONS

Maximum System Voltage	DC 1000V(TÜV)
Operating Temp.	-40°C~+85°C
Maximum Series Fuse	15 A
Max. Wind Load / Max. Snow Load	2400Pa / 5400Pa
Grounding conductivity	<0.1Ω
NOCT	45±2°C
Application Class	Class A
Insulation Resistance	≥100MΩ

### GUARANTEE

10-year limited product warranty

Limited performance warranty: 10 years at 90% of the minimal rated power output, 25 years at 80% of the minimal rated power output


**SHANGHAI JA Solar Technology CO., LTD.**

**Add:** E6-E8 Plot, Minhang Export Processing Zone, Fengxian Shanghai 201401, China  
**Tel:** +86 (21) 3718 1000 **Email:** service@jasolar.com  
**www.jasolar.com**




# JAM5(L)

## 72/180-215 SOLAR PHOTOVOLTAIC MODULE

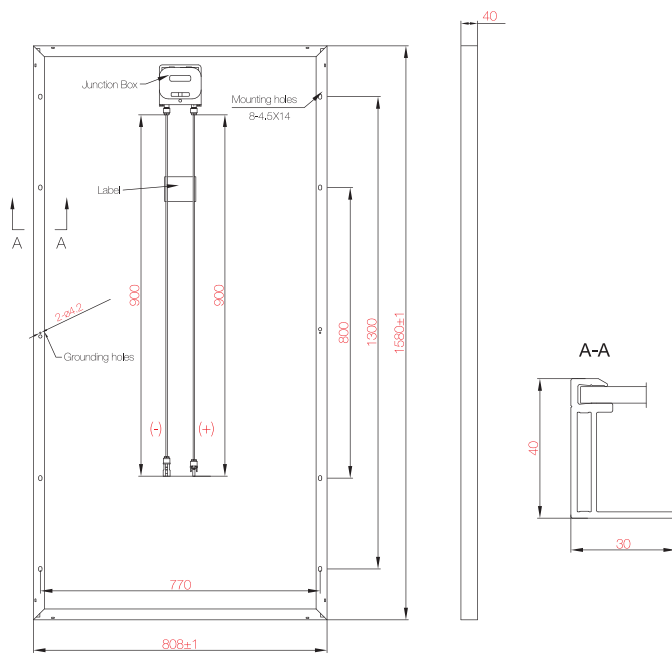

### I-V CURVE

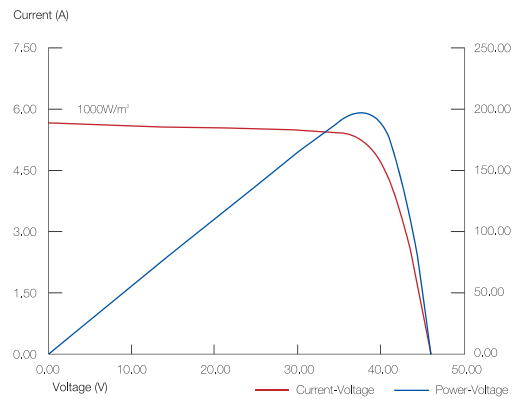

### ELECTRICAL PARAMETERS

TYPE	JAM5(L)-72-180/SI	JAM5(L)-72-185/SI	JAM5(L)-72-190/SI	JAM5(L)-72-195/SI	JAM5(L)-72-200/SI	JAM5(L)-72-205/SI	JAM5(L)-72-210/SI	JAM5(L)-72-215/SI
Rated Maximum Power at STC (W)	180	185	190	195	200	205	210	215
Open Circuit Voltage (Voc/V)	44.88	45.18	45.38	45.50	45.62	45.74	45.90	46.10
Maximum Power Voltage (Vmp/V)	36.42	36.54	36.66	36.96	37.26	37.56	37.86	38.16
Short Circuit Current (Isc/A)	5.44	5.52	5.58	5.63	5.66	5.69	5.73	5.79
Maximum Power Current (Imp/A)	4.94	5.06	5.18	5.28	5.37	5.46	5.55	5.63
Module Efficiency [%]	14.10	14.49	14.88	15.27	15.67	16.06	16.45	16.84
Power Tolerance	±3%							
αIsc	+0.04%/°C							
βVoc	-0.30%/°C							
γPmp	-0.44%/°C							

SHANGHAI JA Solar Technology CO., LTD.

Add: E6-E8 Plot, Minhang Export Processing Zone, Fengxian Shanghai 201401, China  
 Tel: +86 (21) 3718 1000 Email: service@jasolar.com  
 www.jasolar.com

