


JAM5(L)

72/155-195 SOLAR PHOTOVOLTAIC MODULE

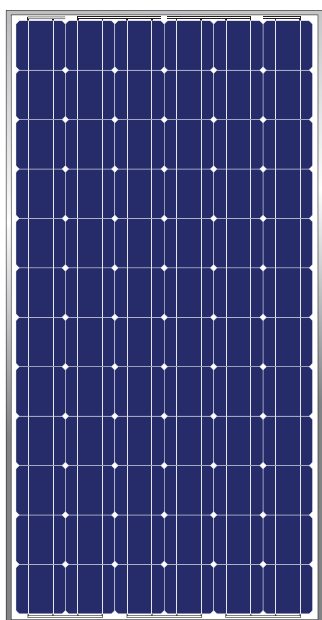

PRODUCT OVERVIEW

- JA Solar's modules are optimally manufactured and adjusted to meet the needs of the current market; scientifically designed module dimension makes the installation simple and easy; each cell of the module is the acclaimed "Made by JA Solar".
- Our continuous efforts in quality assurance system and certifications the international authentication institutions of JA Solar's products demonstrate our commitment to product quality and customer requirements.

MODULE CHARACTERISTICS

- High efficiency crystalline silicon solar cells.
- High transmission low iron tempered glass, strong mechanical resistance.
- Standard waterproof junction box, with bypass diode.
- High endurance to different atrocious weather.
- Custom designed modules according to clients' requirement.

MECHANICAL PARAMETERS

Cell(mm)	Mono 125×125 (L)
Weight(kg)	15.5
Dimensions(L×W×H)(mm)	1580×808×40
Cable Length(mm)	≥900
Cable cross section size(mm ²)	4
No. of cells and connections	72 (12×6)
No. of diodes	3
Packing configuration	25 Pcs./Pallet

WORKING CONDITIONS

Maximum System Voltage	DC 1000V(TÜV) / 600V(UL)
Operating Temp.	-40°C~+85°C
Maximum Series Fuse	15 A
Max. Wind Load / Max. Snow Load	2400Pa / 5400Pa
Grounding conductivity	<0.1Ω
NOCT	47±2°C
Application Class	Class A
Insulation Resistance	≥100MΩ

GUARANTEE

10-year limited product warranty

Limited performance warranty: 10 years at 90% of the minimal rated power output, 25 years at 80% of the minimal rated power output


SHANGHAI JA Solar Technology CO., LTD.

Add: E6-E8 Plot, Minhang Export Processing Zone, Fengxian Shanghai 201401, China
 Tel: +86 (21) 3718 1000 Email: service@jasolar.com
 www.jasolar.com





JAM5(L)

72/155-195 SOLAR PHOTOVOLTAIC MODULE

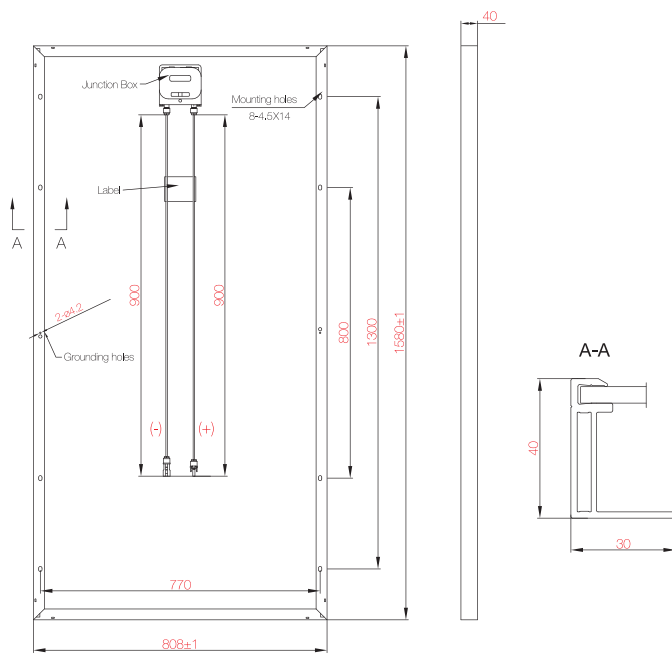

I-V CURVE

Output under different irradiation and the correlation between $I_{sc}/V_{oc}/P_{max}$ and Temperature map

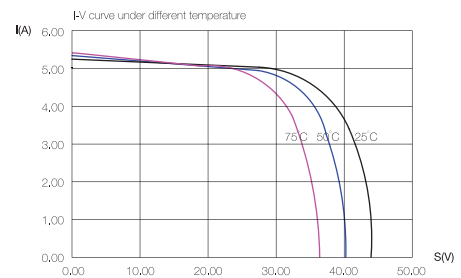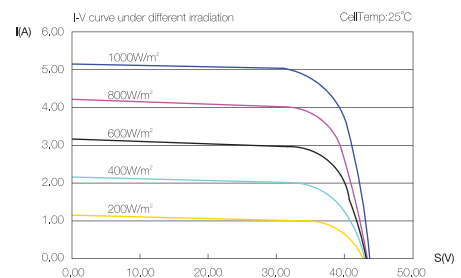

ELECTRICAL PARAMETERS

TYPE	JAM5(L)-72-155	JAM5(L)-72-160	JAM5(L)-72-165	JAM5(L)-72-170	JAM5(L)-72-175	JAM5(L)-72-180	JAM5(L)-72-185	JAM5(L)-72-190	JAM5(L)-72-195
Rated Maximum Power at STC (W)	155	160	165	170	175	180	185	190	195
Open Circuit Voltage (V_{oc}/V)	43.68	43.85	44.02	44.19	44.36	44.53	44.70	44.87	45.04
Maximum Power Voltage (V_{mp}/V)	35.08	35.28	35.48	35.68	35.88	36.08	36.28	36.48	36.68
Short Circuit Current (I_{sc}/A)	4.94	5.03	5.11	5.20	5.28	5.37	5.45	5.54	5.62
Maximum Power Current (I_{mp}/A)	4.42	4.54	4.65	4.76	4.88	4.99	5.10	5.21	5.32
Module Efficiency [%]	12.14	12.53	12.92	13.32	13.71	14.10	14.49	14.88	15.27
Power Tolerance	±3%								
α_{Isc}	+0.037%/°C								
β_{Voc}	-0.297%/°C								
γ_{Pmp}	-0.438%/°C								

SHANGHAI JA Solar Technology CO., LTD.

Add: E6-E8 Plot, Minhang Export Processing Zone, Fengxian Shanghai 201401, China
 Tel: +86 (21) 3718 1000 Email: service@jasolar.com
 www.jasolar.com

